

SMART MOBILITY

The home of charging

Terra AC wallbox



- High-value quality
- Futureproof flexibility
- Safety and protection

At ABB, we have 130 years of heritage in accessible technology leadership and a world-leading AC and DC charging portfolio – for safe, smart and sustainable mobility.

That's why some of the world's biggest brands trust us to provide market-leading e-mobility solutions from highway to home.

ABB: The home of charging

Terra AC wallbox

To serve a growing market

Reducing cost of EVs

EV's will be cheaper than internal combustion engine (ICE) alternatives by the mid-to-late 2020s in almost every market

Global EV sales


Electric vehicles will represent 57% of global passenger car sales by 2040



Passenger EV sales

Passenger EV sales will rise to 28 million in 2030 and 56 million by 2040

Terra AC wallbox provides tailored, intelligent and networked charging solutions for any business, home or location.

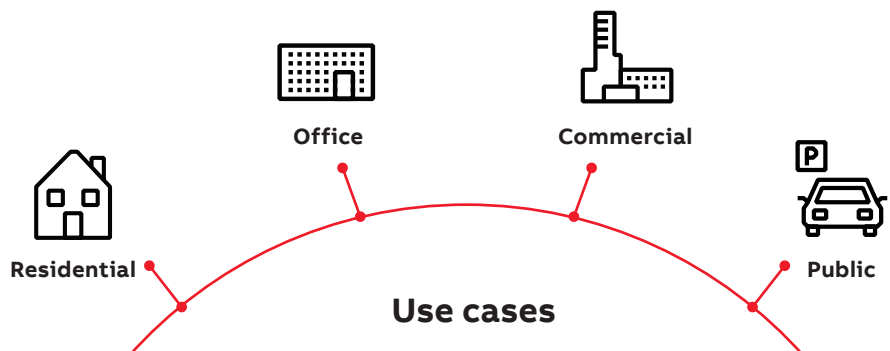

At home

From private homes to multi-tenant homes and residential communities

At work

From small offices to large offices, business parks and complexes

Commercial locations

From hotels to sports institutions and shopping centres

While parking

While on the street or in a car park

Terra AC wallbox benefits

High-value quality



The **best value AC charger** on the market, providing the exceptional quality expected of the world leader in EV charging.



Enabled for **remote software updates** to ensure optimal performance while minimising the need for onsite intervention.



Broad range of connectivity options including Wifi, Bluetooth and Ethernet for easy control and integration with existing infrastructure.

Futureproof flexibility



Smart functionality means the wallbox can adapt its power usage and provide optimal charging, today and into the future.



Set up for **energy meter integration** to provide dynamic load management, reducing energy costs and preventing nuisance tripping of distribution protective devices.



Dedicated App provides easy authentication and control of the AC charger, along with insight into charging status for users.

Safety and protection



Evaluated and tested to the highest standards by independent, third party safety certification organizations.



Current limiting protection allows maximum charging power without nuisance tripping, aligned with the design of a given building's electrical distribution system.





Integrated protections including DC ground fault and over voltage protect both user and car.

Smarter charging

EU portfolio

AC charger for electric vehicles, type 2


Power supply network: 220 ... 240 V single phase and 380 ... 415 V three phase, 50 / 60 Hz

	Rated power (kW)	Max. current (A)	Socket outlet or connector type	Other features	Type	Order code	Weight Pkg (1pce) (kg)
 TAC-W7-T-0	3.7	16	Socket with shutter, type 2	-	TAC-W4-S-0	ABB6AGC082587	2
	7.4	32	Socket, type 2	-	TAC-W7-T-0	ABB6AGC081278	2
			Cable 5 m, type 2	RFID	TAC-W7-G5-R-0	ABB6AGC082155	3.5
Single phase with display and MID certification							
	7.4	32	Socket, type 2	RFID, 4G	TAC-W7-T-RD-MC-0	ABB6AGC082174	2
Three phase							
 TAC-W11-G5-R-0	11	16	Cable 5 m, type 2	RFID	TAC-W11-G5-R-0	ABB6AGC082156	3.5
	22	32	Socket, type 2	-	TAC-W22-T-0	ABB6AGC081279	2
			Socket, type 2	RFID	TAC-W22-T-R-0	ABB6AGC082152	2
			Socket, type 2	RFID, 4G	TAC-W22-T-R-C-0	ABB6AGC082153	2
			Socket with shutter, type 2	RFID	TAC-W22-S-R-0	ABB6AGC082589	2
			Socket with shutter, type 2	RFID, 4G	TAC-W22-S-R-C-0	ABB6AGC082154	2
		Cable 5 m, type 2	RFID, 4G	TAC-W22-G5-R-C-0	ABB6AGC082157	3.5	
Three phase with display and MID certification							
	22	32	Socket, type 2	RFID	TAC-W22-T-RD-M-0	ABB6AGC081280	2
			Socket, type 2	RFID, 4G	TAC-W22-T-RD-MC-0	ABB6AGC081281	2
			Socket with shutter, type 2	RFID, 4G	TAC-W22-S-RD-MC-0	ABB6AGC081282	2
			Cable 5 m, type 2	RFID, 4G	TAC-W22-G5-RD-MC-0	ABB6AGC081285	3.5

North America portfolio

AC charger for electric vehicle, type 1

Power supply network: 110 ... 240 V single phase, 50 / 60 Hz

	Rated power (kW)	Max. current (A)	Socket outlet or connector type	Other features	Type	Order code	Weight Pkg (1pce) (kg)
 TAC-W7-P8-R-C-0	7.4	32	Cable 25 ft, type 1	RFID, 4G	TAC-W7-P8-R-C-0	ABB6AGC082552	4.5
			Cable 25 ft, type 1	RFID, double ethernet	TAC-W7-P8-R-D-0	ABB6AGC081287	4.5
			Cable 25 ft, type 1	RFID, 4G, double ethernet	TAC-W7-P8-R-CD-0	ABB6AGC081288	4.5
Single phase with display							
	7.4	32	Cable 25 ft, type 1	RFID, double ethernet	TAC-W7-P8-RD-MD-0	ABB6AGC081289	4.5
			Cable 25 ft, type 1	RFID, 4G, double ethernet	TAC-W7-P8-RD-MCD-0	ABB6AGC081290	4.5
	9	40	Cable 25 ft, type 1	RFID, 4G, double ethernet	TAC-W9-P8-RD-MCD-0	ABB6AGC082553	4.5
	19	80	Cable 25 ft, type 1	RFID, 4G, double ethernet	TAC-W19-P8-RD-MCD-0	ABB6AGC081291	4.5

Terra AC wallbox accessories

Description	Current (A)	Type	Order code
Pedestal			
For floor standing installation			
Adapter box for 1 or 2 chargers back to back (pole not included)	-	TAC-P1-2 for 60mm pole	ABB6AGC082324
Adapter box for 1 or 2 chargers back to back (60 mm pole included)	-	TAC-P1-2 with 60mm pole	ABB6AGC082576
Metal pole 60 mm with ground plate	-	SER-60mm pole H995mm	ABB6AGC082325
Metal pedestal for 1 or 2 chargers back to back free-standing	-	TAC-P1-2 rectangular	ABB6AGC082326
RFID card (MIFARE)			
RFID cards with ABB logo, pack of 5	-	SER-abbRFIDtags	ABB6AGC082175
RFID cards, blank, pack of 5	-	SER-blankRFIDtags	ABB6AGC082176
Spare cables			
Length: 5 m			
For cable replacement of existing cable version charger			
Type 2, three phase	16	SER-TAC-cable T2 5m3P16A	ABB6AGC082555
Type 2, single phase	32	SER-TAC-cable T2 5m1P32A	ABB6AGC082554
Type 2, three phase	32	SER-TAC-cable T2 5m3P32A	ABB6AGC082556
Type 1, single phase	40	SER-TAC-cable T1 5m1P40A	
Type 1, single phase	80	SER-TAC-cable T1 5m1P80A	
Charge cables			
Length: 7 m			
Cables with 2 connectors of same or different types			
Single phase			
Type 2 to type 1	16	TAC-cable T2-T1 7m1P16A	ABB6AGC082538
Type 2 to type 2	32	TAC-cable T2-T2 7m1P32A	ABB6AGC082535
Type 2 to type 1	32	TAC-cable T2-T1 7m1P32A	ABB6AGC082539
Three phase			
Type 2 to type 2	16	TAC-cable T2-T2 7m3P16A	ABB6AGC082536
Type 2 to type 2	32	TAC-cable T2-T2 7m3P32A	ABB6AGC082537



Technical specification

Product information	
Charging type	Mode 3 charging, level 2
Input/output power rating and current	IEC ratings: Single phase up to 7.4 kW / 32 A Three phase up to 22 kW / 32 A UL ratings up to 19 kW / 80 A
Input/output voltage	Single phase: 110 ... 240 V Three phase: 380 ... 415 V, 50 / 60 Hz
Network type	TT, TN, IT
Socket outlet or connector type	Type 2 socket with or without shutter Type 1 or type 2 cable. Cable can be wrapped around the charger
Protection	Overcurrent, overvoltage, undervoltage, ground fault including DC leakage protection, integrated surge protection
Overvoltage category	III
Energy metering	Revenue grade energy meter Class B (+/- 1%) , MID certification on display variants only
Mobile communication with nano SIM socket	EU: GSM, 4G, LTE, WCDMA US: 4G, LTE, WCDMA
Available configurable contacts	1 input, 1 output
User Interface	
Connectivity	Wifi, Ethernet (RJ45), Bluetooth, RS485/P1, 4G / 3G
User authentication	ABB RFID card (1 included) or App
User interface	App, ABB web portal
Communication protocols	OCPP 1.6 and RS485/P1 for energy meter connection
Status indication	5 multicolor LED's
Configuration	
Software update	OCPP 1.6, ABB web portal or App
Control and configuration	ABB web portal or App
General characteristics	
Lifetime	10 years. 16 h charging, 8 h standby, 5 charge sessions per day
IP and IK rating	IP54, IK10 (IK8+ for operating temperature from -35 to -30 °C)
NEMA enclosure type	NEMA 4 and 4X
Operating altitude	4000 m
Operating temperature range	-35...+50 °C (derating may apply)
Storage temperature range	-40...+80 °C
Mounting	Wall or floor using a pedestal
Dimensions	H x W x D 320 x 195 x 110 mm
	H x W x D 12.60 x 7.68 x 4.33 inches
Certification and standards	
Safety standards	IEC/EN 61851-1, IEC/EN 62311, IEC/UL 62479, IEC/UL 62955 TuV listed conforming to UL 2594, UL 2231-1, UL 2231-2, UL 1998, CSA C22.2. NO.280
Codes and standards	IEC 61851-21-2, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12 CE RED- WLAN / RFID / E-UTRA: EN 300 328 V2.1.1, EN 300 330 V2.1.1, EN 301 908-1 V11.1.2, EN 301 908-13 EN 50470-1, EN 50470-3 FCC Part 15 Class B ENERGY STAR
Certification	CE, CB, MID, UL
Warranty	24 months

Smarter by design

- The App allows streamlined charger configuration
- Ready for integration with advanced smart building energy system
- Simple software update via the App makes the charger future-ready

With the user in mind

- Enables users to authenticate their charger via the App or RFID card. Configuration is easily done via the App or ABB web portal
- Sends charging status via the App
- Provides information about the status of chargers (availability, number of sessions, energy delivery)



CTMS Technology Co., Ltd.

19/8 Moo.18 , Soi Lamlukka 12 ,
Khu Khot, Lam Luk ka,
Pathaum Thani 12130
Phone : 02 - 531-7111 , 083 - 9897907
E - mail : info@ctms.co.th
Website : www.ctms.co.th
Line : @ctms



Additional information

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.
Copyright© 2020 ABB - All rights reserved.

